

MILLENNIUM CONFERENCE
Price and Specification Guide
USA



Effective July 10, 2023

krug

Advancing Design Through Innovation

MILLENNIUM | TABLE OF CONTENTS

MILLENNIUM CONFERENCE TABLES

- 167 Environmental Summary
- 168 Features & Options
- 169 Special Pricing Guidelines
- 170 Tops
- 172 Bases
- 173 Base Requirements Chart
- 174 Power Box

CONNEXUS™ TABLETOP CONNECTIVITY SOLUTION

- 175 Connexus™
- 177 Preconfigured Standard Modules
- 179 Preconfigured Large Modules
- 180 Custom Connexus™
- 182 Port Options
- 186 Connexus™ Location Charts


MILLENNIUM MEDIA

- 191 Media

LEED CI CREDITS



MATERIAL CONTENT:

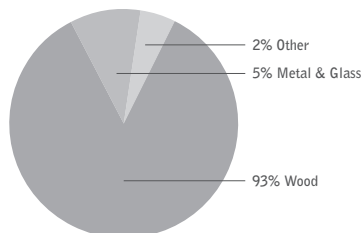

PRE-CONSUMER RECYCLED CONTENT - 74%
POST-CONSUMER RECYCLED CONTENT - 2.5%

		CONTRIBUTES To
Credit 2.1 - 2.2	Construction Waste Management	1-2 point(s)
Credit 3.3	Resource Reuse	1 point
Credit 4.1	Recycled Content	1 point
Credit 4.2	Recycled Content	1 point
Credit 4.5	Low Emitting Materials, (MUST BE REQUESTED) Composite Wood & Laminate Adhesives	1 point
Credit 5.1	Regional Materials*	1 point
Credit 6	Rapidly Renewable Materials (MUST BE REQUESTED)	1 point
Credit 7	Certified Wood (MUST BE REQUESTED)	1 point

*This credit is only applicable if in total 20% of the combined value of the procurement of construction materials and in the furniture are manufactured within a radius of 500 miles. This credit will apply if the installation of the finished product occurs within 500 miles of Kitchener, Ontario.



level® CERTIFICATION

BIFMA's e3 Furniture Sustainability Standard is a voluntary, multi-attribute standard that measures the degree of sustainability of furniture. This standard evaluates product and company environmental attributes and compliance systems in a wide range of elements which include Materials, Energy & Atmosphere, Human & Ecosystem Health and Social Responsibility. Millennium products have earned level®, BIFMA's sustainability certification program for furniture, certification through third-party verification against the e3 standard. All Millennium products can be supplied with level® certification. In order to accomplish this, the product must also be ordered with the air-emissions-certification option. Contact customer service for information and upcharges.



The mark of responsible forestry

AIR-EMISSIONS

All Millennium products can be supplied with air-emissions-certified materials. Contact customer service for information and upcharges.

FSC®

In 2005, Krug received Forest Stewardship Council® (FSC®) Chain-of-Custody certification for our manufacturing facilities. The FSC® Chain-of-Custody tracks certified wood from seedling to final sale. It signifies that the growth, harvesting and production of goods are entirely achieved through responsible forestry, which guarantees a healthy supply of forest resources for generations to come. Millennium and other Krug products can be specified with one of two types of FSC® Certification: (a) FSC®-certified (which includes FSC®-certified lumber, veneer and substrate material) (b) FSC®-mix certified (which includes substrate material only, and is a lower cost option certification) Contact customer service for further information, pricing and lead times.



In addition, architects, designers, and building professionals can specify FSC®-certified products in order to achieve a point from the U.S. Green Building Council's Leadership in Energy and Environmental Design (LEED) Rating System.

MILLENNIUM | FEATURES & OPTIONS

EDGE PROFILES

Millennium conference product is available in Oak, Maple, Walnut and Cherry with a 32° sheen and seven distinctive edge details. Millennium conference product edge profiles match those of Millennium casegoods. Please specify an edge profile for all Millennium conference tops, and bases where indicated.



Seville
- contrasting crisp and rounded sculpted edge



Madrid
- ribbon fluted edge



Zamora
- bull nose edge



Valen
- transitional beveled edge



Barcelona
- half round edge



Williamsburg
- traditional edge



Torrens
- softened square edge

DRAWER PULLS



Oyster



Luna



Eclipse



Crescent



Williamsburg

Pulls are available in Satin Nickel, Matte Black, Polished Chrome, Black Chrome, and Brushed Brass. Pull color must be mentioned clearly on the purchase order. Pulls are located on all drawer fronts, storage wood doors, and bookcase wood doors. Glass door bookcases feature the Luna knob in the same finish as pulls on the order. Glass door hutches and wood door hutches do not have pulls. If a pull style and finish is not provided, the Eclipse pull in Black Chrome will be applied to the product. A Williamsburg pull in polished brass finish is standard on all products specified with the Williamsburg edge detail.

BASES

All bases are shipped separately and require assembly to selected top. Refer to the base requirements chart on page 173 to select the appropriate bases and sizes for conference tops. Round drums and rectangular conference bases require an edge profile to be specified, please select from the drawings shown in the previous section. Metal bases are available in a choice of chrome or black powder coat epoxy.

FINISH

A five step catalyzed varnish finish that when dry has a sheen value of 32°, is applied to all cases.

CUSTOM CONFERENCE TABLES

Krug has extensive capabilities for customization of conference tables, including special sizes, finishes, veneers, and special features such as ganging or mobility options. Please contact Customer Service with specific requirements and a drawing for more information.

SEATING CAPABILITIES

To establish seating capabilities, an outside chair dimension of 24" has been used for this price list, plus an allowance of 5" between chairs, for a total of 29". This is an approximation only. When using another chair, particularly seating with a 5 prong caster base, be sure to adjust the approximate seating capacity accordingly. Since not all manufacturers use this same formula, when a seating capacity is in question, please contact Krug Customer Service to review the specific seating that is being used with Krug Conference product.

BIRDSEYE MAPLE

Birdseye Maple veneer is available on 6800 Millennium conference tops at an upcharge of **\$71 list** per square foot. Birdseye Maple is recommended in a clear finish only. This option could extend regular lead times.

LAMINATE WORKSURFACES

Laminate worksurfaces are available at an upcharge of 10% (a higher upcharge may apply to specially priced plastic laminates). Where there are wood profile edges on worksurface tops, they will remain as wood profiles on laminate tops. Krug will order and procure laminates. Purchase orders with a plastic laminate option must include Laminate Name.

Krug reserves the right to decline a laminate that may not be suitable for the application. Krug assumes no responsibility for the durability, consistent coloration or any other performance characteristic of a customer specified laminate. Laminates may extend the normal lead-time, check with Customer Service for current scheduling information. Please see page 347 for laminate information.

MILLENNIUM | SPECIAL PRICING GUIDELINES AND PRICING METHODS

CONFERENCE

Custom sizing and additional customization is available on Krug Conference product. For more information or to obtain quotations, please contact Krug Customer Service.

Other Customization Pricing Methods for Conference

One side square add **\$221**

OTHER PRICING METHODS

6800 & 9800 - any case where tops are

Flush left/right or both add: **\$112**

9800 storage units-flush **\$185**

6800 glass tops on buffets add: **\$2202** for 60", 72", & 84" cases

Grommets in non-standard positions **\$142 list.**

Microphone cut outs per table for up to 7 microphone cut outs **\$351 list**

EXCEPTIONS TO THE PRICING METHODS ABOVE

Sizes larger than largest shown in Price List.

Non-standard extension on drawer slides.

Non-standard drawer depths in standard depth pedestals.

Glass door – any style.

Curvilinear tops with non-standard radius.

A/V cabinets.

Any case with flipper doors.

Lecterns.


Conference tables with non-standard bases, power boxes or positions.


6200 conference tables – non-standard sizes.

Please contact Krug Customer Service at 1.888.578.KRUG if you require assistance.

PLEASE NOTE: Cases with non-standard features do not apply to the rules above. Contact Krug Customer Service if you require assistance.

MILLENNIUM | TOPS

Description	Model	Cherry Maple Walnut	Approx. Seating	Sections	Shipping Weight	Cubes
Millennium Square and Rectangular Tops 	6801-36-36	1879	4	1	52	3
	6801-42-42	2103	4	1	58	4
	6801-48-36	2156	4	1	65	3
	6801-48-42	2304	4	1	72	4
	6801-48-48	2372	4	1	84	4
	6801-60-30	2493	6	1	68	4
	6801-60-36	2547	6	1	78	4
	6801-60-60	3649	6	1	132	6
	6801-72-36	2776	6	1	100	5
	6801-84-42	3569	8	2	140	7
	6801-96-42	3908	8	2	180	8
	6801-96-48	4249	8	2	200	9
	6801-120-48	5132	10	3	240	11
	6801-120-54	5571	10	3	265	12
	6801-144-54	6385	12	3	310	14
	6801-168-54	7670	12	4	355	16
	6801-192-54	8371	12	4	400	18
	6801-216-60	9581	14	5	490	23
	6801-240-60	10648	16	5	560	25
	6801-264-60	11705	16	6	630	28
6801-288-60	12781	18	6	700	30	

Millennium Racetrack Tops 	6802-72-36	3459	6	1	100	5
	6802-84-42	3695	8	2	140	7
	6802-96-42	3928	8	2	160	8
	6802-96-48	4242	8	2	185	9
	6802-120-48	5437	10	3	225	11
	6802-120-54	5828	10	3	255	14
	6802-144-54	6513	12	3	300	16
	6802-168-54	7832	12	4	345	16
	6802-192-54	8540	12	4	390	18
	6802-216-60	10088	14	5	480	23
	6802-240-60	11202	16	5	550	25
	6802-264-60	12325	16	6	620	28
	6802-288-60	13195	18	6	690	30

All Millennium Conference products are available on the Krug Express Program with a size limitation of up to and including 168" tables only.

ORDERING PROCEDURE

To order, please specify the following:


- 1) Krug product model number
- 2) Wood species and finish
- 3) Wood edge detail - S, V, T, M, B, Z or W
see page 168


STANDARD FINISHES


For a complete list of standard finishes please see page 347.

BASE REQUIREMENTS

See Page 173 for the base requirements chart.

Description	Model	Cherry Maple Walnut	Approx. Seating	Sections	Shipping Weight	Cubes
 Millennium Boat Shaped Tops	6804-96-48-42	4457	8	2	185	8
	6804-120-48-42	6120	10	2	255	10
	6804-144-48-42	6841	12	2	300	12
	6804-168-48-42	8223	12	3	345	12
	6804-192-54-48	8967	12	4	390	18
	6804-216-54-48	10590	14	5	480	23
	6804-240-54-48	11761	16	5	550	25
	6804-264-60-48	12944	16	6	620	28
	6804-288-60-48	13858	18	6	690	30

 Millennium Arc Ended Tops	6806-72-36	3459	6	1	100	5
	6806-84-42	3695	8	2	140	7
	6806-96-42	3928	8	2	160	8
	6806-96-48	4242	8	2	185	9
	6806-120-48	5437	10	3	225	11
	6806-120-54	5828	10	3	255	14
	6806-144-54	6513	12	3	300	16
	6806-168-54	7832	12	4	345	16
	6806-192-54	8540	12	4	390	18
	6806-216-60	10088	14	5	480	23
	6806-240-60	11202	16	5	550	25
	6806-264-60	12325	16	6	620	28
6806-288-60	13195	18	6	690	30	

 Millennium Round Tops	6805-36 dia.	1875	3	1	48	3
	6805-42 dia.	2199	4	1	54	4
	6805-48 dia.	2392	5	1	74	4
	6805-54 dia.	3171	6	1	100	6
	6805-60 dia.	3952	7	1	134	6

All Millennium Conference products are available on the Krug Express Program with a size limitation of up to and including 168" tables only.

ORDERING PROCEDURE

To order, please specify the following:

- 1) Krug product model number
- 2) Wood species and finish
- 3) Wood edge detail - S, V, T, M, B, Z or W
see page 168

See page 346 for *KrugExpress* program.

STANDARD FINISHES


For a complete list of standard finishes please see page 347.

WIRE ACCESS DOORS

Please specify wire access doors on bases when ordering tops in conjunction with wiring grommets.


MILLENNIUM | BASES

Description	Model	Cherry Maple Walnut			L	W	H	Shipping Weight	Cubes
Round Wood Drum	6810-18D-29		1057		18 Dia.	-	29	97	7
Millennium Edge Detail	6810-24D-29		1078		24 Dia.	-	29	115	14
	6810-30D-29		1406		30 Dia.	-	29	135	20



Please select a Millennium edge detail for this item.
Please add **WMD** to the end of the model number for wire management.
Wire management cavity for this base is:
6810-18D-29 – 18” diameter by 16” in height
6810-24D-29 – 24” diameter by 16” in height
6810-30D-29 – 30” diameter by 16” in height


Half Round Wood Drum	6809-18-9-29		851		18 Dia.	9	29	68	4
Millennium Edge Detail	6809-24-12-29		1013		24 Dia.	12	29	89	8
	6809-30-15-29		1119		30 Dia.	15	29	110	12



Please select a Millennium edge detail for this item.
Please add **WMD** to the end of the model number for wire management.
Wire management cavity for this base is:


6809-18-9-29 – 1/2 of 18” diameter by 13 1/4” in height
6809-24-12-29 – 1/2 of 24” diameter by 17 1/4” in height
6809-30-15-29 – 1/2 of 30” diameter by 17 1/4” in height

Elliptical Wood Panel	6816-24-6-29		1107		24	6	29	25	4
	6816-30-6-29		1188		30	6	29	35	6



Wire management cavity for this base is:
6816-24-6-29 – 24” elliptical shape width by 25” in height
6816-30-6-29 – 30” elliptical shape width by 25” in height

Wood Panel	6815-28-6-29		958		28	6	29	30	4
	6815-34-6-29		1028		34	6	29	50	6



Wire management cavity for this base is:
6815-28-6-29 – 28” x 6” rectangular by 25” in height
6815-34-6-29 – 34” x 6” rectangular by 25” in height

DIMENSION KEY

L – length
W – width
H – height

Model numbers represent nominal dimensions only. Contact Customer Service if dimensions are critical.

STANDARD FINISHES

For a complete list of standard finishes please see page 347.

BASE REQUIREMENTS


See page 173 for the base requirements chart.

POWER BOXES


See page 174 for information on conferencing power boxes.

MILLENNIUM | BASE REQUIREMENTS CHART


Half Round Drum Base
6809




Round Drum Base
6810



Elliptical Wood Panel
6816



Wood Panel
6815



















Top Size	Quantity	Size	Quantity	Size	Quantity	Size	Quantity	Size
36 diameter			1	18				
36 - 36			1	18				
42 diameter			1	18				
42 - 42			1	18				
48 - 36			1	18				
48 - 42			1	18				
48 diameter			1	18				
48 - 48			1	18				
54 diameter			1	24				
54 - 54			1	24				
60 - 30	2	18	2	18				
60 - 36	2	18	2	18	2	24	2	28
60 diameter			1	30				
60 - 60				1	30			
72 - 36	2	18	2	18	2	24	2	28
84 - 42	2	18	2	18	2	24	2	28
96 - 42	2	18	2	18	2	24	2	28
96 - 48	2	18	2	18	2	24	2	28
96-48-42	2	18	2	18	2	24	2	28
120 - 48	2**	18	2	18	3	24	3	28
120-48-42			2	18	3	24	3	28
120 - 54	2*	24	2	24	3	30	3	34
144 - 54	2*	24	2	24	3	30	3	34
144-48-42	2**	18	3	18	3	24	3	28
168 - 54	2*	24	3	24	4	30	4	34
168-48-42			3	18	3	24	3	28
192 - 54	2*	24	3	24	4	30	4	34
192-54-48			2	18	2	24	2	28
			1	24	2	30	2	34
216-54-48			2	18	2	24	2	28
			1	24	3	30	3	34
216 - 60			3	30	5	30	5	34
240-54-48			2	18	2	24	2	28
			2	24	3	30	3	34
240 - 60			4	30	5	30	5	34
264 - 60			4	30	6	30	6	34
264-60-48			2	18	2	24	2	28
			2	30	4	30	4	34
288 - 60			4	30	6	30	6	34
288-60-48			2	18	2	24	2	28
			2	30	4	30	4	34

*Add an additional 24" diameter drum base for center-support.
 **Add an additional 18" diameter drum base for center-support.

MILLENNIUM POWER BOX UPCHARGES


This chart applies to Millennium & Stratford square/rectangular, racetrack, arc ended and round tops:

This chart applies to Millennium & Stratford boat shaped tops: racetrack, arc ended and round tops:


Single / Multi Section Tops	Standard Top Sizes	\$ Upcharge per table	Single / Multi Section Tops	Standard Top Sizes	\$ Upcharge per table
 68PB	36 diameter 36-36 42 diameter 42-42 48-36 48-42 48 diameter 48-48	873		96-48-42 144-48-42	1746
	54 diameter 54-54 60 diameter 60-60	1746		144-48-42	1746
	60-30 60-36 72-36	1746		120-48-42	2616
	84-42 96-42 96-48	1746		168-48-42 192-54-48	1746
	120-48	1746		216 - 54 - 48	3665
	120 - 54 *144 - 54	3665			
	*168 - 54 *192 - 54	3665		240 - 54 - 48	5582
	216 - 60	5582			
	240 - 60 288 - 60	7498		264-60-48 288-60-48	5582

* Stratford Conference tops only, feature single power box configuration.

Note: When specified with power boxes, standard tops sizes must be ordered in configurations shown above. Upcharges shown are list prices.



Indicate 18" round and square drum bases with one power box facing ends of top.



Indicate 24" and 30" round and square bases with twin power box facing sides of top.

Connexus™ is Krug's proprietary tabletop connectivity solution. When opened, it presents power and data outlets on a convenient angle to the user and provides storage for wiring.


The faceplate of Connexus™ is available in either Glass or Aluminum and sits flush with the tabletop. It is designed to allow wiring to pass through the surface cover in both the open and closed positions. The faceplate opens to a 100° angle from the table top.

Connexus™ utilizes UL standard receptacle outlets. Connexus™ offers 11 pre-configured units with a wide selection of power, data and presentation system outlets, or alternatively can be purchased with just electrical ports with blank data ports. Connexus™ also can be designed and built specifically to meet your connectivity needs by using the snap-in or plate mounted port options.


All corded units can be modified to allow the units to be hard wired by an electrician and data ports can be reconfigured easily when desired. To facilitate this process, the Enclosure Box of each Connexus™ module is easily removable.

*All duplex outlets are contained within a metal box that is attached to the Partition Plate. If additional outlets need to be added in the future, these boxes need to be ordered from Krug to expand the enclosure. All modifications must be done by a qualified electrician.


The label drawing shown below illustrates the way a Connexus™ module is shipped to the user. The Partition Plate is mounted on-site to the underside of the top with the Enclosure Box over top to conceal the module. Please note, enclosure boxes are not required when modules are enclosed in a base. Enclosure boxes are not supplied with Connexus™ modules; they must be ordered separately when required.

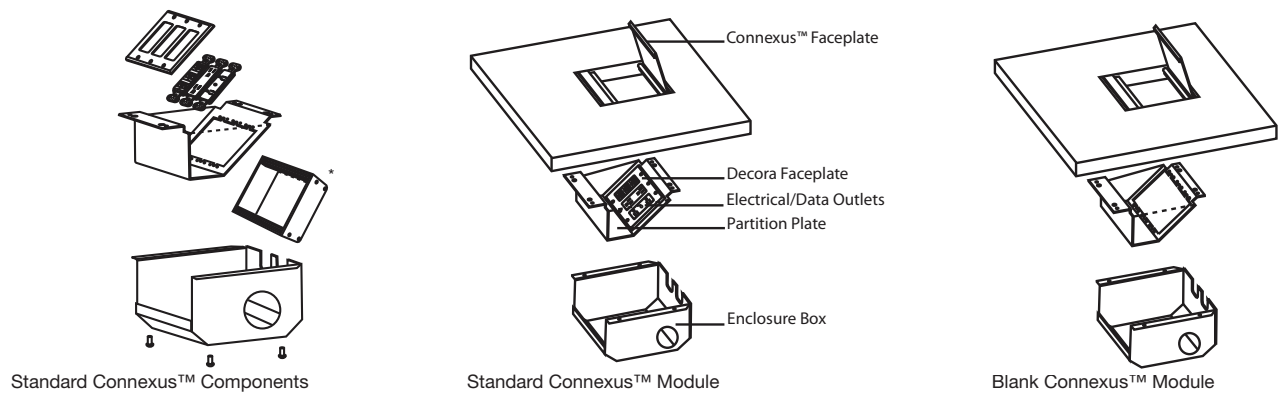

CONNEXUS™ SIZES



Standard - 3 Gang



Large - 4 Gang

Connexus™ modules may be specified in Standard or Large sizes.

Standard modules are available in 7 standard configurations or custom configurations. Connexus™ modules in Standard configurations are 6 1/8" x 7 3/8". Depth on Standard module is 4.5".

Large modules are available in 4 standard configurations or custom configurations. Connexus™ modules in Large configurations are 8 1/4" x 7 3/8". Depth on Large module is 4.5".

CONNEXUS™

Connexus™ modules are wired independently of each other to maximize the amount of electrical devices serviced. All Connexus™ modules may sustain individual loads of 15 amps or 12 amps of continuous load. Each Connexus™ module will require a single isolated circuit to maximize its service capabilities. An optional utility a/c power outlet is available on the back surface of the outlet box.

Connexus™ components are UL and CSA US approved and manufactured in accordance to the National Electrical Code. Hardwiring Connexus™ modules on-site must be performed by a licensed electrician. Connexus™ units can be ordered with an optional utility outlet, which is located on the bottom side of the Connexus™ unit and underneath the work surface. Other Connexus™ products could employ these utility outlets as a source of power. In this scenario, it is solely the responsibility of the end user to assure that proper circuit protection is in place that never exceeds the 15 Ampere Circuit Breaker Rating.

ELECTRICAL CORD LENGTHS

Connexus™ modules come with pre-determined electrical cord lengths that are suited to the size and configuration of each table (16' & 25'). Each will plug into a standard floor monument power source. However, in situations where a table length exceeds our maximum cord length, a second power entry is necessary to avoid daisy-chaining of electrical power. To determine when a second power entry is required follow these steps:


1. Select your Connexus™ locations.
2. Select your Floor Monument Location(s) if they do not already exist in the room.
3. If the number of Connexus™ modules exceed three consecutive positions left or right of the power entry, then an additional power entry will be required.

Note: Connexus™ modules in pairs count as one position.

HARDWIRING ON SITE






For hardwiring on-site by electricians, please use the following schematic:

- ① Power Supply Cord
- ② Strain Relief
- ③ Fork Terminals
- ④ Duplex Receptacles
- ⑤ Outlets with Circuit Breaker Assembly
- ⑥ Handy Box

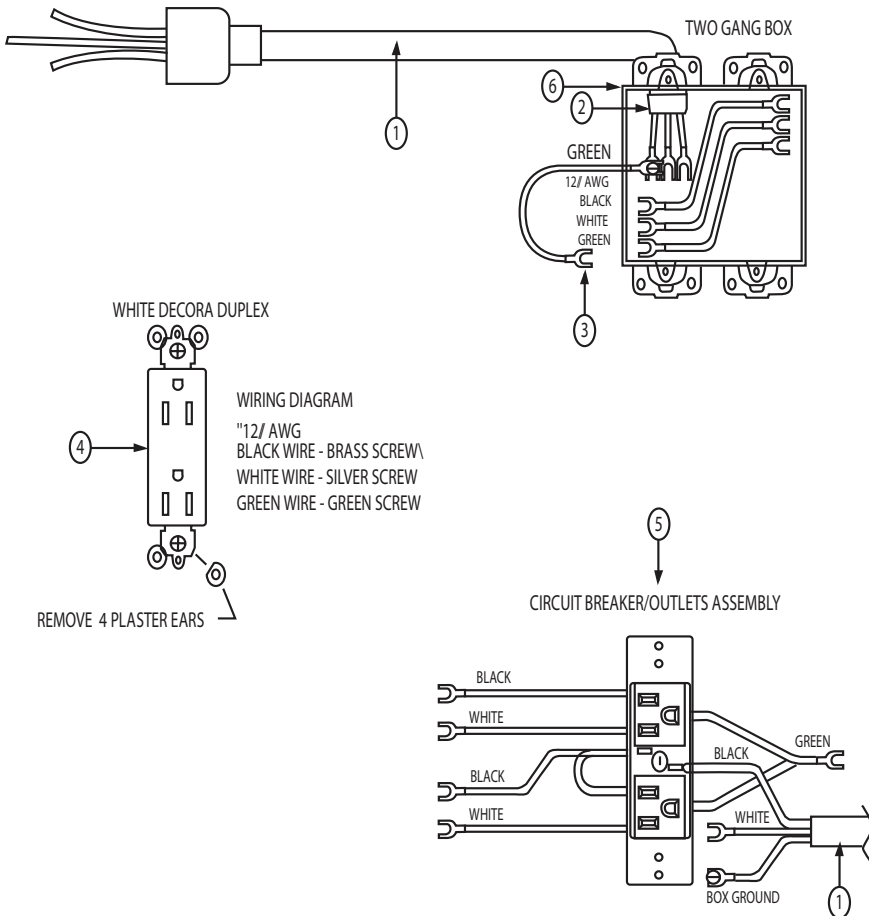

CONNEXUS™ | PRECONFIGURED STANDARD MODULES

Standard - 3 GANG



Port Options	Model #	List Price	
		Aluminum	Glass

BASIC DATA

62 CON BD

922

1019

- (A) (2) Blanks (for future use)
- (B) (2) RJ45 port (Category 6)
- (C) (2) AC power ports

BASIC VOICE DATA

62 CON BV

894

992

- (A) (2) Blanks (for future use)
- (B) (1) RJ11 port
(1) RJ45 port (Category 6)
- (C) (2) AC power ports

EXPANDED DATA

62 CON ED

1134

1231

- (A) (4) RJ45 port (Category 6)
- (B) (2) AC power ports
- (C) (2) AC power ports / with 15 amp circuit breaker

EXPANDED VOICE/DATA

62 CON

1162

1259

- (A) (2) RJ11 port
(4) RJ45 port (Category 6)
- (B) (2) AC power ports
- (C) (2) AC power ports / with 15 amp circuit breaker

BASIC MULTIMEDIA

62 CON BM

1050

1147


- (A) (1) RJ11 port
(1) RJ45 port (Category 6)
- (B) (1) 3.5 mm Mini
(1) VGA Type 15 pin HD
- (C) (2) AC power ports

ORDERING NOTE: Enclosure box is only required only when the Connexus™ is not positioned over a base. If an enclosure box is required, please clearly state this requirement on your purchase order and add the \$281 per Connexus™.


CONNEXUS™ | PRECONFIGURED STANDARD MODULES

Standard - 3 GANG

Port Options	Model #	List Price	
		Aluminum	Glass




DATA & MULTIMEDIA	62 CON DM	1336	1426
(A)	(1) RJ11 (1) RJ45 (1) Fiber Optic LC Duplex (1) 3.5mm Stereo Mini (1) USB "A" (1) HDMI		
(B)	(1) DVI-I (1) VGA		
(C)	(2) AC power ports		




BASIC FIBRE OPTIC & MULTIMEDIA	62 CON BF	1282	1371
(A)	(2) Fibre Optic SC Simplex (2) Fiber Optic LC Duplex (1) RJ11 (1) RJ45		
(B)	(1) HDMI (1) 3.5mm Stereo Mini (2) USB "A" (2) Blanks		
(C)	(2) AC power ports		

ORDERING NOTE: Enclosure box is only required only when the Connexus™ is not positioned over a base. If an enclosure box is required, please clearly state this requirement on your purchase order and add the **\$260** per Connexus™.



STANDARD BLANK MODULE	62 CON X1	105
------------------------------	-----------	-----






Blank Modules does not include the Connexus™ lid.



DUPLEX OUTLET ENCLOSURE	62 CON OUTBOX-1	40
To be used when adding duplex outlets to existing Connexus™ Modules.	62 CON OUTBOX-2	54
	62 CON OUTBOX-3	67

CONNEXUS™ | PRECONFIGURED LARGE MODULES

Large - 4 GANG



Port Options	Model #	List Price	
		Aluminum	Glass

NETWORK AND POWER CENTRE

62 CON NP

1412

1496

- (A) (6) RJ-45 ports
- (B) (2) AC power ports
- (C) (2) AC power ports
- (D) (2) AC power ports/with 15 amp circuit breaker

BASIC MULTIMEDIA WITH 2X POWER

62 CON B2

1293

1376

- (A) (1) RJ11 port
(1) RJ45 port
- (B) (1) 3.5 mm Mini with 2x Power
(1) VGA type 15 pin HD
- (C) (2) AC power ports
- (D) (2) AC power ports/with 15 amp circuit breaker

DATA & MULTIMEDIA WITH 2X POWER

62 CON DM2

1692

1775

- (A) (1) RJ11 port
(1) RJ45 port
(1) 1 Fiber Optic LC Duplex
(1) 1 3.5mm Stereo Mini
(1) 1 USB "A"
(1) 1 HDMI
- (B) (1) DVI-I
(1) VGA
- (C) (2) AC power ports
- (D) (2) AC power ports/with 15 amp circuit breaker

EXPANDED FIBRE OPTIC AND MULTIMEDIA

62 CON EF

1760

1845

- (A) (2) Fibre Optic SC Simplex
(4) Fiber Optic LC Duplex
- (B) (1) HDMI,
(1) Stereo 3.5 Mini
(2) USB "A",
(1) RJ45
(1) RJ11
- (C) (2) AC power port
- (D) (2) AC power ports/with 15 amp circuit breaker

LARGE BLANK MODULE

62 CON X2

127

Blank Modules does not include the Connexus™ lid.

ORDERING NOTE: Enclosure box is only required when the Connexus™ is not positioned over a base. If an enclosure box is required, please clearly state this requirement on your purchase order and add the **\$281** per Connexus™.












CONNEXUS™ | CUSTOM CONNEXUS™

Planning a custom Connexus™ unit is easy when following these 6 simple steps.


STEP ONE: Select the quantity of AC power ports or AC power ports with USB Charging (select configurations only) that are required.

Power modules must always be positioned starting from the right side of the unit. For example, 3 gang Connexus™ can have a power module located in position C with data ports in position A and B, or power can be located in position B and C with data port in position A, or position A,B and C can have all power ports or all data ports. Please note, 4 gang Connexus™ are not available with power ports located in position A.


On select configurations shown below, USB charging outlets are available. These charging outlets allow a user to charge most personal electronic devices without the need for any special power adapter or a computer - simply plug in your device with any compatible USB cable. This component has 2 USB charging slots that supply 5V DC at 700mA. Comes with a charging indicator light, as well as a standard 120 volt simplex receptacle on the bottom portion of the component.

Standard Connexus™	List Price	Large Connexus™	List Price
 <p>3 Gang: Data ports only E300 - Standard Data Ports</p>	72	 <p>4 Gang: Data Ports only E400 - Large Data Ports</p>	148
 <p>3 Gang: AC Power Port E31S - Standard Outlet E31U - Standard & Utility Outlets</p>	492 525	 <p>4 Gang: AC Power Port E41S - Large Outlet E41U - Large & Utility Outlets</p>	553 588
 <p>3 Gang: AC Power Port / AC Power Port with 15 amp circuit breaker E32S - Standard Outlet E32U - Standard & Utility Outlet</p>	644 679	 <p>4 Gang: AC Power Port / AC Power Port with 15 amp circuit breaker E42S - Large Outlet E42U - Large & Utility Outlets</p>	722 754
 <p>3 Gang: AC Power Port Simplex with USB Charging/AC Power Port with 15 amp circuit breaker E32SC - Standard Outlet E32UC - Standard & Utility Outlet</p>	854 888	 <p>4 Gang: AC Power Port Simplex with USB Charging/AC Power Port with 15 amp circuit breaker E42SC - Standard Outlet E42UC - Standard & Utility Outlet</p>	930 964
 <p>3 Gang: (2) AC Power Port / AC Power Port with 15 amp circuit breaker E33S - Standard Outlet E33U - Standard & Utility Outlet</p>	783 818	 <p>4 Gang: (2) AC Power Port / AC Power Port with 15 amp circuit breaker E43S - Large Outlet E43U - Large & Utility Outlets</p>	771 806
		 <p>4 Gang: (2) AC Power Port Simplex with USB Charging/AC Power Port with 15 amp circuit breaker E43SC - Standard Outlet E43UC - Standard & Utility Outlet</p>	981 1013

STEP TWO : There are two cord end options available; Plug In and Conduit. The standard Plug In option will connect with any standard floor monument power source. The Conduit option is Liguatite® (a steel inner conduit with a PVC overlay) by Anamet, meant for specific hard wiring applications. Units can come in cord lengths of 16' or 25'. Not Applicable if no power is selected.

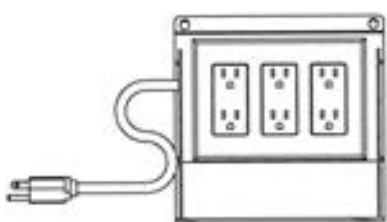


EP
Electrical Plug In
No Upcharge

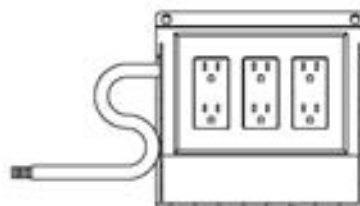


EC
Electrical Conduit
Add upcharge
16' 125
25' 208


STEP THREE: There are two data options available; Plate mounted ports or Snap-in ports. Snap-in ports are available in configurations of two, four or six. Choose the faceplate below that meets your data requirements. If an odd number of Snap-in ports are required, a blank port needs to be selected when the opening is not in use.




M02
Mounting Plate (2)
accepts two snap in data ports
Add \$36 list



M04
Mounting Plate (4)
accepts four snap in data ports
Add \$36 list



M06
Mounting Plate (6)
accepts six snap in data ports
Add \$36 list



M00
Mounting Plates
Add \$36 list

STEP FOUR: Choose the Plate mounted port or Snap-in ports options for non-powered positions. As an aid, use the chart below to help design and build your Connexus™ to meet the rooms needs. Use the check boxes and list the components on the lines below.

Standard Connexus™


(A)	(B)	(C)
<input type="checkbox"/> POWER	<input type="checkbox"/> POWER/POWER & USB CHARGING	<input type="checkbox"/> POWER
OR	OR	OR
<input type="checkbox"/> PLATE MOUNTED PORT	<input type="checkbox"/> PLATE MOUNTED PORT	<input type="checkbox"/> PLATE MOUNTED PORT
OR	OR	OR
<input type="checkbox"/> SNAP-IN PORTS	<input type="checkbox"/> SNAP-IN PORTS	<input type="checkbox"/> SNAP-IN PORTS
_____	_____	_____
_____	_____	_____
_____	_____	_____

Large Connexus™

(A)	(B)	(C)	(D)
<input type="checkbox"/> POWER	<input type="checkbox"/> POWER/POWER & USB CHARGING	<input type="checkbox"/> POWER/POWER & USB CHARGING	<input type="checkbox"/> POWER
OR	OR	OR	OR
<input type="checkbox"/> PLATE MOUNTED PORT	<input type="checkbox"/> PLATE MOUNTED PORT	<input type="checkbox"/> PLATE MOUNTED PORT	<input type="checkbox"/> PLATE MOUNTED PORT
OR	OR	OR	OR
<input type="checkbox"/> SNAP-IN PORTS	<input type="checkbox"/> SNAP-IN PORTS	<input type="checkbox"/> SNAP-IN PORTS	<input type="checkbox"/> SNAP-IN PORTS
_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____


STEP FIVE: Select the Connexus™ Cover (Aluminum or Glass)

Standard Connexus™



3 GANG
3CCA Aluminum 351 list
3CFG Glass 434 list
3C00 No Lid

Large Connexus™



4 GANG
4CCA Aluminum 364 list
4CFG Glass 449 list
4C00 No Lid


STEP SIX: Enclosure box is only required only when the Connexus™ is not positioned over a base. If an enclosure box is required, please clearly state this requirement on your order and add the **\$281** per Connexus™.

STEP SEVEN: Calculate the total list price for the custom Connexus™ by adding the following prices:


- Connexus™ Box with required AC Power Ports
- Faceplate (Snap-in Ports Only)
- Snap-In Ports or Plate Mounted Data Ports
- Enclosure Box (if required)
- Connexus™ Lid (Aluminum or Glass)

CONNEXUS™ | PORT OPTIONS


PLATE MOUNTED PORTS Reference Code Description List Price




P01 **VGA & 3.5 STEREO MINI** - Use for VGA (DB15) connections and for 3.5mm stereo connections. Connector is a female input with screw terminal output (back side of Console interface). 134




P02 **DVI-I DUAL (DIGITAL/ANALOG) & 3.5 STEREO MINI** - Use for DVI Integrated - Digital and Analog connections and for 3.5mm stereo connection. The DVI connector is a Dual Link. DVI-I connector is a female-to-female pass through and the 3.5 Mini is a female input with screw terminal output (back side of Console interface). 197




P03 **DVI-D DUAL (DIGITAL)** - Use for DVI-D Digital only connection. The connector is a Dual Link. Connector is a female-to-female pass through. 127




P04 **DVI-I DUAL (DIGITAL/ANALOG) & VGA** - Use for DVI Integrated - Digital and Analog and for VGA (DB15) connections. The DVI connector is a Dual Link. Both connectors are female-to-female pass through. 252



P05 **DVI-I DUAL (DIGITAL/ANALOG)** - Use for DVI Integrated - Digital and Analog connections. DVI connector is a Dual Link. Connector is a female-to-female pass through. 161









P06 **VGA-2** - Use for two VGA (DB15) connections. Both connectors are female-to-female pass through. 156



P07 **DISPLAYPORT** - Use for DisplayPort connection. This connector is primarily used to connect a video source to a display device and also carries audio signals, Connector is a female input to a 3' corded output (back side of Console interface) with a male Display Port termination. 156

CONNEXUS™ | PORT OPTIONS

PLATE MOUNTED PORTS	Reference Code	Description	List Price
	P08	MICROPHONE XLR STANDARD - Use for standard size XLR microphone connection. Connector is a female input with a 3 pin screw terminal output (back side of Console interface).	212
	P09	MICROPHONE STANDARD XLR -2 - Use for two standard size XLR microphone connections. Each connector is a female input with a 3 pin screw terminal output (back side of Console interface).	309
	P10	3 HOLE CABLE PASS THROUGH - Use for running loose cables from the under side of the table up into the Console interface cavity. Often used with running wires for PolyCom™ devices.	51
	P11	VGA-to-BNCx2 - Use for two VGA (DB15) connections that are input female pass through and are terminated on the output (back side of Console interface) with 5 BNC female pigtail connections, for each VGA connector.	504
	P12	INPUT VGA & 3.5 Stereo (POWERED) - VGA + Audio Line Driver designed for VGA (DB15) connections and for 3.5mm stereo connections. This unit provides a method of transmitting signals to a remote display and audio receiver or amplifier. VGA connector is a female input and comes with cabling for either VGA output, or 5 BNC output and the 3.5 Mini is a female input with screw terminal output (back side of Console interface). A 9 volt DC 500mA power supply is required to power this unit.	1231
PORT ACCESSORIES	Reference Code	Description	List Price





















DVIR

DVI-REPEATER - Is a cable equalizer that automatically compensates for long DVI cable runs. This unit extends the usable cable distance up to 130ft depending on the quality of the cable and the resolution of the video signal. Additionally, it is capable of extending dual link signals allowing for much greater resolutions and refresh rates. This unit comes with a power supply and is generally mounted underneath a table.

971

CONNEXUS™ | PORT OPTIONS

SNAP IN PORTS	Reference Code	Description	List Price
	S01W S01B S01R	RJ-45 - Category 6 data connection. This connector is also downwards compatible with Category 5 cabling. Connector is a female input with a #110 punch-down terminal block output (back side of Console interface) for on-site hard wire connection. RJ45-CAT6 (White) RJ45-CAT6 (Blue) RJ45-CAT6 (Red)	43
	S02W S02B S02G S02R S02Y	RJ11 - Telephone type connection. Connector is a female input with a #110 punch-down terminal block output (back side of Console interface) for on-site hard wire connection. RJ11 (White) RJ11-B (Black) RJ11-G (Green) RJ11-R (Red) RJ11-Y (Yellow)	30
	S03	3.5 STEREO MINI - 3.5mm stereo connection. Connector is a female input with screw terminal output (back side of Console interface).	85
	S04	HDMI - High Definition Multimedia Interface connection. Connector carries both HD audio and video data. Connector is a female-to-female pass through.	161
	S05	RCA-LEFT - RCA left audio channel connection. Color coded with black. Connector is a female-to-female pass through.	36
	S06	RCA-RIGHT -RCA right audio channel connection. Color coded with red. Connector is a female-to-female pass through.	36
	S07	RCA- VIDEO - RCA video channel connection. Color coded with yellow. Connector is a female-to-female pass through.	36
	S08	USB-A - Full size USB "A" style connection. Connector is a female-to-female pass through.	58


SNAP IN PORTS	Reference Code	Description	List Price
	S09	3 PIN MINI XLR - 3 Pin Mini XLR microphone connection. Connector is a female input to a 6' corded output (back side of Console interface) with a 3 Pin Mini XLR male termination.	686
	S10	S-VIDEO - S-Video connection. Connector is a female-to-female pass through.	63
	S11	PS/2 (6 PIN MINI DIN) - PS/2 (mouse, keyboard, other input devices) connections. Connector is a female-to-female pass through.	79
	S12	BNC - BNC style data connection for use with co-axial cable. Connector is a female-to-female pass through.	43
	S13	F-TYPE - F-Type (DSL, Cable) connections, generally for high speed Internet or video applications. Connector is a female-to-female threaded pass through.	36
	S14	FIBER OPTIC SC - Fibre Optic SC Simplex connection. Connector is a female-to-female pass through. Please note that two of these connectors are required to complete the data transmissions to and from the source and destination units.	43
	S15	FIBER OPTIC LC - Fibre Optic LC Duplex connection. Connector is a female-to-female pass through. One connector only is required to complete the data transmissions to and from source and destination units.	85
	S16	USB-B - USB "B" type connection. Connector is a female "B" input to a female "A" output (back side of Console interface). This connector is reversible.	127
	S17	RJ12 (White) - RJ12 style PolyCom™ connection. Connector is a female input with a 6' corded output (back side) of Console interface) with a male RJ12 termination.	274
	S00	BLANK COVER - Blank covers are required when port is not in use.	16

NOTE: Up to 6 snap-in data ports can be ordered for open data positions. Snap-in adaptors can accept 2, 4 or 6 snap-in data ports. Please order a blank port when an odd number of snap-in ports are specified.


MILLENNIUM | CONNEXUS™ LOCATIONS CHARTS

TOP STYLES


BASE STYLES



Square



Round




Round Drum Base

The Connexus™ Locations diagrams below show the available Connexus™ locations for only the top and base configurations shown above. Please note that the maximum allowable Connexus™ modules per top are shown, and tops may be specified with fewer modules. Each Connexus™ module has a code to represent its location on the table surface. To specify a Connexus™ module in a particular location, please use the code listed above it.


Note: One Connexus™ module is available where two modules are shown. Please refer to location code above the drawing for single center location in which case the Connexus™ unit will face West if on the left end of the top, and East if on the right end of the top. For large Connexus™ units please replace “3” in location code with “4”.

ACN3




Represents 42” and 48” top locations

ACN3




Represents 42”, 48” and 54” top locations

ACN3



Represents 60” top locations

ACN3



Represents 60” top locations

18” Drum bases will accommodate single standard Connexus™ units only.
 24” Drum bases will accommodate single standard or large Connexus™ units only.
 30” Drum bases will accommodate single or double standard or large Connexus™ units.




REPRESENTS MODULES THAT WHEN OPENED FACE THE ENDS OF THE TABLE




REPRESENTS MODULES THAT WHEN OPENED FACE THE SIDES OF THE TABLE

MILLENNIUM | CONNEXUS™ LOCATIONS CHARTS

TOP STYLES

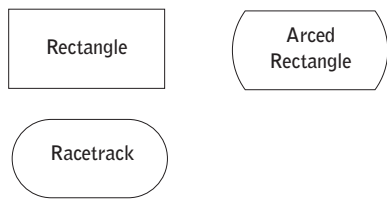


BASE STYLES



The Connexus™ Locations diagrams below show the available Connexus™ locations for only the top and base configurations shown above. Please note that the maximum allowable Connexus™ modules per top are shown, and tops may be specified with fewer modules. Each Connexus™ module has a code to represent its location on the table surface. To specify a Connexus™ module in a particular location, please use the code listed above it.

Note: One Connexus™ module is available where two modules are shown. Please refer to location code above the drawing for single center location in which case the Connexus™ unit will face West if on the left end of the top, and East if on the right end of the top. For large Connexus™ units please replace “3” in location code with “4”.

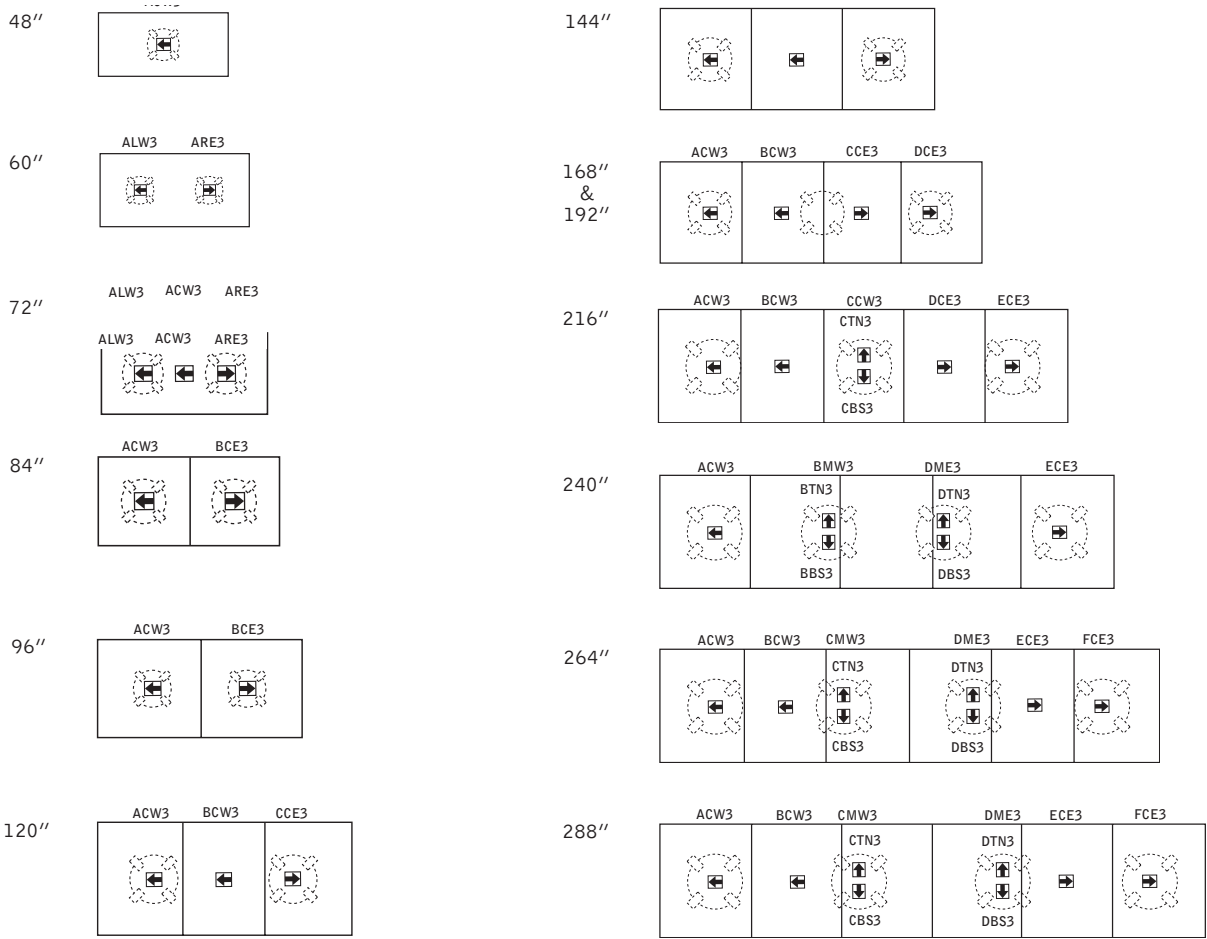

18" Drum bases will accommodate single standard Connexus™ units only.

18" Drum bases will accommodate single standard Connexus™ units only.

24" Drum bases will accommodate single standard or large Connexus™ units only.

30" Drum bases will accommodate single or double standard or large Connexus™ units.


REPRESENTS MODULES THAT WHEN OPENED FACE THE ENDS OF THE TABLE

REPRESENTS MODULES THAT WHEN OPENED FACE THE SIDES OF THE TABLE

MILLENNIUM | CONNEXUS™ LOCATIONS CHARTS


TOP STYLES

BASE STYLES

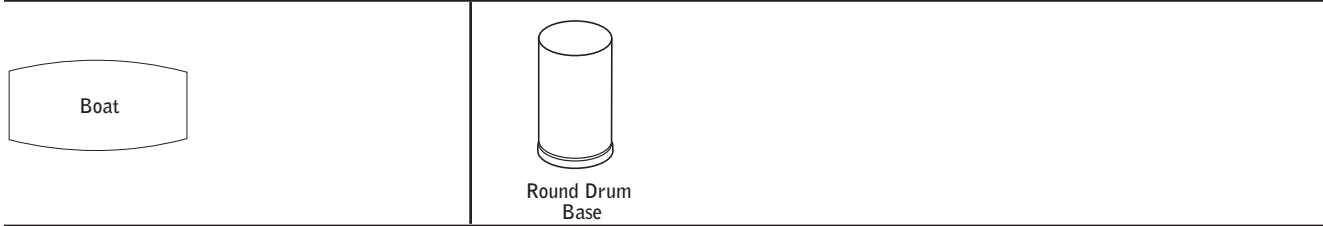



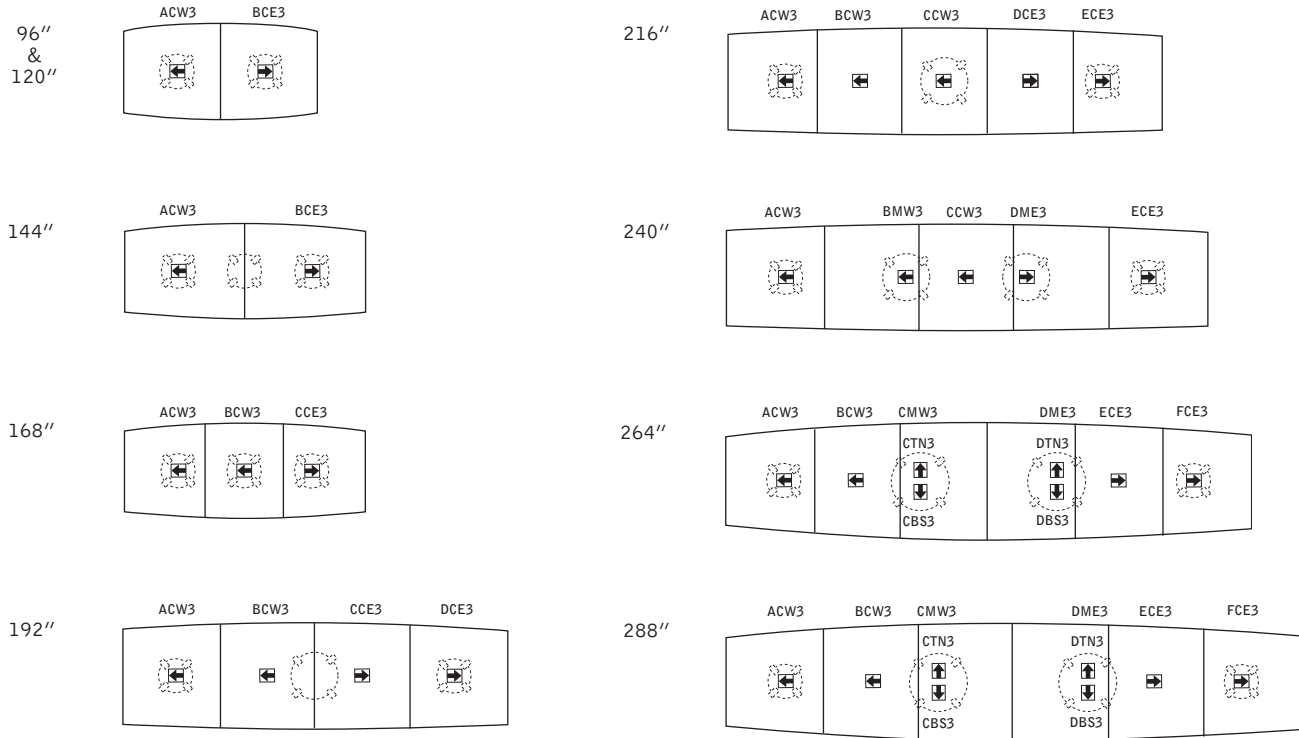

The Connexus™ Locations diagrams below show the available Connexus™ locations for only the top and base configurations shown above. Please note that the maximum allowable Connexus™ modules per top are shown, and tops may be specified with fewer modules. Each Connexus™ module has a code to represent its location on the table surface. To specify a Connexus™ module in a particular location, please use the code listed above it.

Note: One Connexus™ module is available where two modules are shown. Please refer to location code above the drawing for single center location in which case the Connexus™ unit will face West if on the left end of the top, and East if on the right end of the top. For large Connexus™ units please replace “3” in location code with “4”.




18" Drum bases will accommodate single standard Connexus™ units only.
 24" Drum bases will accommodate single standard or large Connexus™ units only.
 30" Drum bases will accommodate single or double standard or large Connexus™ units.

  REPRESENTS MODULES THAT WHEN OPENED FACE THE ENDS OF THE TABLE


  REPRESENTS MODULES THAT WHEN OPENED FACE THE SIDES OF THE TABLE

MILLENNIUM | CONNEXUS™ LOCATIONS CHARTS

TOP STYLES








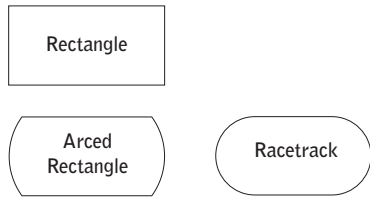


BASE STYLES

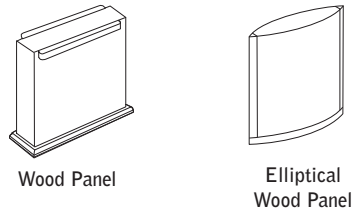

The Connexus™ Locations diagrams below show the available Connexus™ locations for only the top and base configurations shown above. Please note that the maximum allowable Connexus™ modules per top are shown, and tops may be specified with fewer modules. Each Connexus™ module has a code to represent its location on the table surface. To specify a Connexus™ module in a particular location, please use the code listed above it.

Note: One Connexus™ module is available where two modules are shown. Please refer to location code above the drawing for single center location in which case the Connexus™ unit will face West if on the left end of the top, and East if on the right end of the top. For large Connexus™ units please replace “3” in location code with “4”.

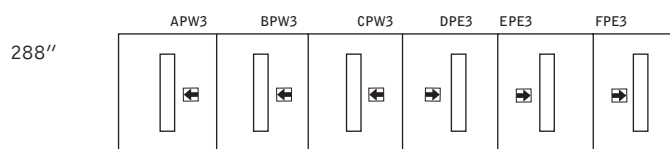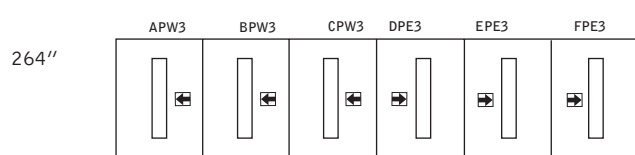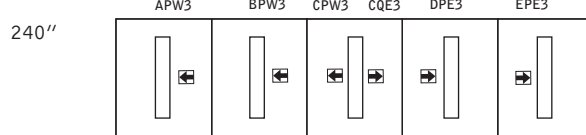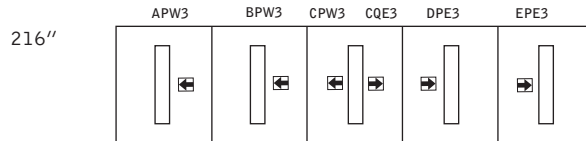


REPRESENTS MODULES THAT WHEN OPENED FACE THE ENDS OF THE TABLE

REPRESENTS MODULES THAT WHEN OPENED FACE THE SIDES OF THE TABLE


MILLENNIUM | CONNEXUS™ LOCATIONS CHARTS

TOP STYLES




Boat

BASE STYLES









Wood Panel







Elliptical Wood Panel

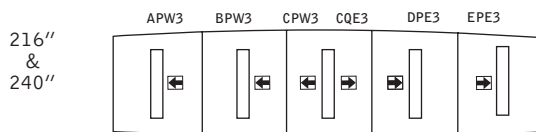
The Connexus™ Locations diagrams below show the available Connexus™ locations for only the top and base configurations shown above. Please note that the maximum allowable Connexus™ modules per top are shown, and tops may be specified with fewer modules. Each Connexus™ module has a code to represent its location on the table surface. To specify a Connexus™ module in a particular location, please use the code listed above it.

Note: One Connexus™ module is available where two modules are shown. Please refer to location code above the drawing for single center location in which case the Connexus™ unit will face West if on the left end of the top, and East if on the right end of the top. For large Connexus™ units please replace “3” in location code with “4”.




  REPRESENTS MODULES THAT WHEN OPENED FACE THE ENDS OF THE TABLE


  REPRESENTS MODULES THAT WHEN OPENED FACE THE SIDES OF THE TABLE


Description	Model	Cherry Maple Walnut	L	w	H	Shipping Weight	Cubes
	68VB-3632	2964	36.25	5.25	32	89	4
	68VB-4832	3231	48	5.25	32	105	6
	68VB-4848	3397	48	5.25	48	143	9

Includes an upholstered tackboard or optional cork surface. Please specify a tackboard fabric when ordering. Visual boards also include a flip chart and four dry erase markers. An optional pull down screen is also available at **\$258 list**.


	68LN-272348	4233	27.25	23	48.5	194	21
---	-------------	------	-------	----	------	-----	----

Includes one open shelf and one closed shelf, an electrical plug-in and four casters. An adjustable reading light is also available at an upcharge of **\$243 list**. Please select hardware pull and finish.


	68LN-272320	1576	27.2	22.8	19.6	30	7
---	-------------	------	------	------	------	----	---

	68BU-712036	5400	71	20.25	36	380	55
---	-------------	------	----	-------	----	-----	----

Includes one cutlery tray in drawer and an adjustable shelf in each of the three storage compartments. Please select hardware pull and finish.

	68TV-362461	5671	36	24.25	61	210	44
---	-------------	------	----	-------	----	-----	----

Cabinet has pocket doors on top and hinged doors on bottom. Includes a pull-out swivel T.V. shelf, a VCR shelf, grommets for wire management and air vents in back panel.

	68PS-362436	3357	36.25	24.25	36	145	20
---	-------------	------	-------	-------	----	-----	----

Interior shelf is adjustable. Cart comes with a 2" grommet in back center located 8 1/2" below the top.

ORDERING PROCEDURE
 To order, please specify the following:

- 1) Krug product model number
- 2) Wood species and finish
- 3) Wood edge detail - S, V, T, M, B, Z or W see page 168
- 4) Pull style and finish, see page 168

STANDARD FINISHES
 For a complete list of standard finishes please see page 347.

BASE REQUIREMENTS
 See page 173 for the base requirements chart.



www.fsc.org
FSC® C021699

The mark of responsible forestry



All products are air emissions certified and are available as FSC® certified

krug

solutions@krug.ca | www.krug.ca | 1.888.578.KRUG