SUSTAINABLE PERFORMANCE SILICA CARD

MOMENTUM T E X T I L E S



solutions@krug.ca | www.krug.ca | 1.888.578.5784

## SPECIFICATIONS

54" Pattern	Fiber Content & Backing	Abrasion (D.R.)	Light- fastness	Approx. Repeats	Cleaning Code
SILICA	100% Silicone Polyester Backing	365,000	200 Hrs. Class 4.5		WS Bleach Cleanable (4:1)
SILICA ANDY	100% Silicone Polyester Backing	500,000	200 Hrs. Class 4.5	25" L, 19 %" W	WS Bleach Cleanable (4:1
SILICA CUSP	100% Silicone Polyester Backing	500,000	200 Hrs. Class 4.5	12 ½" L, 12 %" W	WS Bleach Cleanable (4:1
SILICA DEFLECT	100% Silicone Polyester Backing	500,000	200 Hrs. Class 4.5	25" L, 13 ¾" W	WS Bleach Cleanable (4:1
SILICA ETCH	100% Silicone Polyester Backing	270,000	200 Hrs. Class 4.5		WS Bleach Cleanable (4:1
SILICA HIATUS	100% Silicone Polyester Backing	500,000	200 Hrs. Class 4.5	12 ¾" L, 24 ½" W	WS Bleach Cleanable (4:1
SILICA LEATHER	100% Silicone Polyester Backing	210,000	200 Hrs. Class 4		WS Bleach Cleanable (4:1
SILICA REACH	100% Silicone Polyester Backing	500,000	200 Hrs. Class 4.5	12 ½" L, 11 %" W	WS Bleach Cleanable (4:1
SILICA STRIDE	100% Silicone Polyester Backing	500,000	200 Hrs. Class 4.5	24 ¾" L, 24 ¾" W	WS Bleach Cleanable (4:1
SILICA TECH	100% Silicone Polyester Backing	270,000	200 Hrs. Class 5		WS Bleach Cleanable (4:1

\*ACT® Registered Certification Marks

EXPLANATION OF **ACT** ICONS FOR UPHOLSTERY

FIRE RETARDANCY Flammability testing determined as fabric's resistance to burning. PASSES California 117-2013 COLORFASTNESS TO WET & DRY CROCKING Colorfastness to wet & dry crocking refers to the rubbing off of color from the fabric onto clothing, hands or other materials and can occur under wet or dry conditions. PASSES
AATCC 8-1974 Dry Crocking, Class 4 minimum; Wet Crocking, Class 3 minimum COLORFASTNESS TO LIGHT Colorfastness to light is the degree to which fabric will retain its color when exposed to light. AATCC 16A-1974 or AATCC 16E-1976; Class 4 minimum at 40 hours
NOTE: Class 4 minimum at 60 hours is recommended for direct sunlight exposure situations

PHYSICAL PROPERTIES 3 physical property tests include: brush pill test to determine a fabric's pilling. Breaking/tensile strength is the ability of a fabric to withstand tension without breaking or tearing. Seam slippage is the pulling apart of fabrics at the seams. PASSES
Brush Pill ASTM D3511, 3-4 minimum
Breaking Strength ASTM D3597-D1682-64 (1975) 50 lbs. minimum in warp & weft

Seam Slippage ASTM D3597-D434-75 25 lbs. minimum in warp & weft

Abrasion is the ability of a fabric to withstand damage from wear and rubbing. There is a general contract specification as well as a heavy duty specification.

PASSES

General Contract ASTM 3597 modified (#10 cotton duck); 15,000 double rubs Wyzenbeek Method

Heavy Duty ASTM 3597 modified (#10 cotton duck); 30,000 double rubs Wyzenbeek Method or ASTM D4966 (with 21 oz. weight); 40,000 rubs Martindale Method

CLEANING CODE DEFINITIONS

WS: Water-based cleaning agents or foam Bleach Cleanable (4:1)




ABRASION

GREENGUARD Gold Certified. CA Section 01350 compliant. Eligible for CHPS Low-Emitting Material Credits.



For memo samples please contact. M O M E N T U M Canada 905-670-5002 Toll Free 800-366-6839 memosamples.com

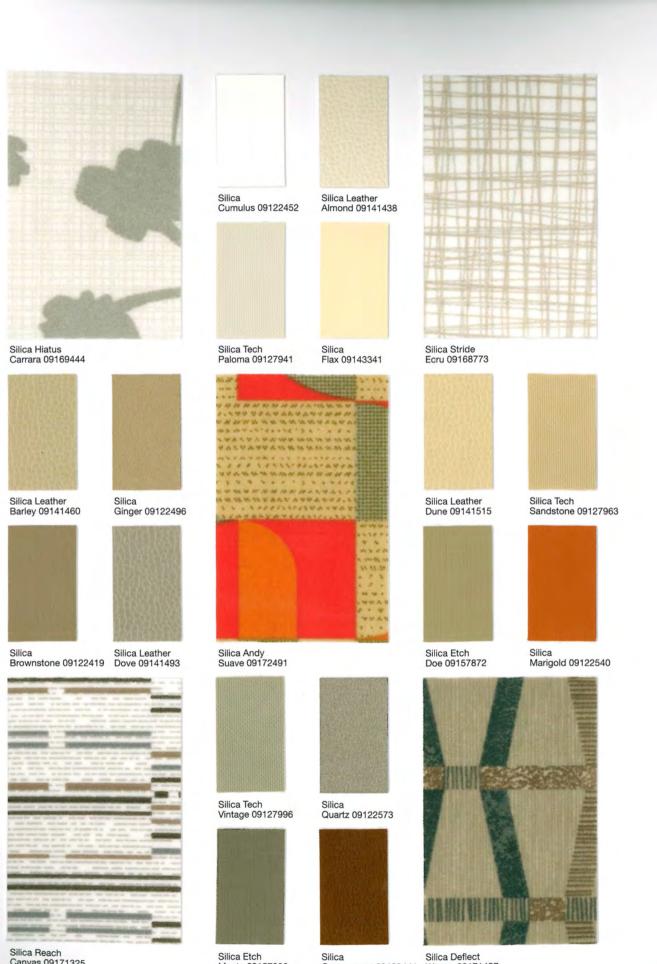

Canvas 09171325

Silica Deflect

Coppercrest 09122441 Wenge 09171457

Manta 09157938

















Silica Stride

Limestone 09168784

Mane 09126555

Tropic 09122606

Silica Etch

Silica Etch

Silica

WELLOW E . \*\*\*\*\*\*\*\*

Wetstone 09158037

Rain 09158004